



FOHAMA

Transformador para uso del Petróleo

50
ANIVERSARIO

INDUSTRIA ARGENTINA



tecnología
nacional



www.fohama.com.ar



Fohama Electromecánica SRL



FohamaSRL



FOHAMA



Registrado



Registrado






TRANSFORMER CONFIGURATION AND DIMENSIONS ARE PRELIMINARY AND MAY VARY UPON FINAL ENGINEERING






GRÁFICOS DRAWINGS

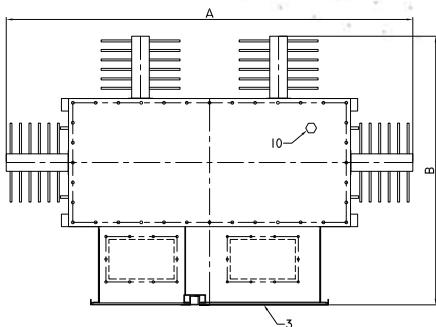

POWER [KVA]	PRIMARY VOLTAGE[V]	SECONDARY VOLTAGE[V]	A [MM]	B [MM]	C [MM]	WEIGHT [KG]
150	480	800-2700	1600	900	1450	1500
200		1100-3811	1800	1000	1500	1650
260		1100-3811	2100	1050	1500	1850
350		1100-3811	2100	1200	1550	2300
400		1100-3811	2100	1400	1650	2520
450		1100-3811	2100	1500	1700	2680
560		1400-4850	2200	1500	1750	3000
750		1400-4850	2300	1500	1800	3500
1000		1400-4850	2500	1600	2000	4100

ITEM	REFERENCES	ITEM	REFERENCES
1	PRIMARY BUSHINGS	10	OIL FILLING PLUG
2	SECONDARY BUSHINGS	11	OIL DRAIN VALVE
3	NAMEPLATE	12	GROUNDING PAD
4	TAP CHANGERS	13	SKID TYPE BASE
5	OIL LEVEL	14	LIFTING LUGS
6	VACUUM METER	15	OIL SAMPLE VALVE
7	OVERPRESSURE RELIEF VALVE	16	JACKING PADS
8	NITROGEN VALVE		
9	THERMOMETER		

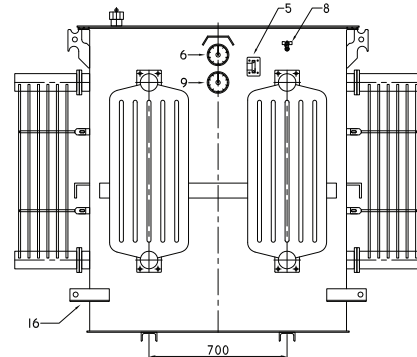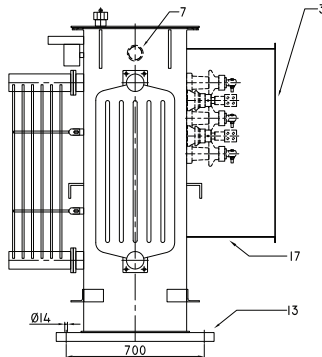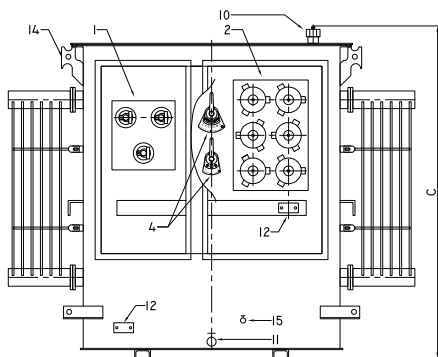

OIL / Field Type Transformer for artificial lift

INDUSTRIA ARGENTINA



Step up transformers for VSD
(Variable Speed Drive)
0.480 or 0.380 KV / 0.7 to 5 KV

Step down transformers for
VSD fixed frequency from 0.38
to 36KV / 0.38 KV (6, 12, 18, or 24 pulse)

Step down transformers for
ESP fixed frequency
from 0.38 to 36 KV / 0.7-5 KV



transformadores@fohama.com.ar
ventas@fohama.com.ar



(54 11) 4682-5910 (rot.)
Fax: Int. 126
Ventas: (54 11) 4635-8862

Avda. Larrazábal 2328 (C1440CVP)
Ciudad Autónoma de Buenos Aires
República Argentina

